



**COTTOD'ESTE**  
Nuove Superfici



**OUTDOOR COLLECTION**

**20mm**

ULTRA THICK  
PORCELAIN  
STONEWARE

**GRES PORCELLANATO  
SUPERSPESSORATO**

ULTRA THICK PORCELAIN  
STONEWARE.

**20mm**

ULTRA THICK  
PORCELAIN  
STONEWARE

## INDEX

|                          |    |
|--------------------------|----|
| 20MM                     | 6  |
| BLUESTONE EVOLUTION      | 12 |
| BUXY FLAMMÈ              | 16 |
| CADORE                   | 20 |
| CEMENT PROJECT           | 24 |
| CLUNY                    | 28 |
| LIMESTONE                | 34 |
| PLEIN AIR                | 38 |
| SECRET STONE             | 46 |
| STONEQUARTZ              | 52 |
| Caratteristiche tecniche | 64 |
| Certificazioni           | 66 |

**COTTOD'ESTE**  
Nuove Superfici

LA  
BELLEZZA  
IN  
CERAMICA

## UN GRES PORCELLANATO RESISTENTE E FUNZIONALE. UNA CERAMICA PROGETTATA PER L'OUTDOOR.

RESISTANT AND FUNCTIONAL PORCELAIN STONEWARE.  
CERAMICS ESPECIALLY DESIGNED FOR OUTDOOR USE.



**GARANTITO 20 ANNI**  
GUARANTEED FOR 20 YEARS



**INGELIVO**  
FROST PROOF



**ALTISSIMA RESISTENZA AI CARICHI**  
EXTREMELY HIGH RESISTANCE TO BREAKING LOADS



**FACILMENTE PULIBILE**  
EASY TO CLEAN



**ELEVATA RESISTENZA AGLI SBALZI TERMICI**  
EXCEPTIONAL THERMAL SHOCK RESISTANCE



**ECOLOGICO**  
ECOFRIENDLY



**INATTACCABILE DA MUFFE E BATTERI**  
RESISTANT TO MILDEW AND BACTERIA



**IGNIFUGO**  
FLAME-RETARDANT



**INATTACCABILE DAGLI ACIDI**  
ACID RESISTANT



**RESISTENTE ALLE MACCHIE E ALL'INQUINAMENTO**  
STAIN AND POLLUTION RESISTANT



**CARRABILE QUANDO INCOLLATA SU MASSETTO**  
TRANSITABLE WHEN APPLIED TO A SCREED WITH ADHESIVE



**FACILMENTE POSABILE, RIMOVIBILE E RIUTILIZZABILE**  
EASY TO INSTALL, REMOVE AND REUSE



**SUPERFICIE ANTISCIVOLO**  
NON-SLIP SURFACE



**COLORI INALTERABILI DALLA LUCE**  
COLOUR-FAST



**RESISTE AL SALE**  
SALT RESISTANT




**ELEVATA RESISTENZA MECCANICA**  
HIGH MECHANICAL RESISTANCE




## APPLICAZIONI


### POSSIBLE INSTALLATIONS

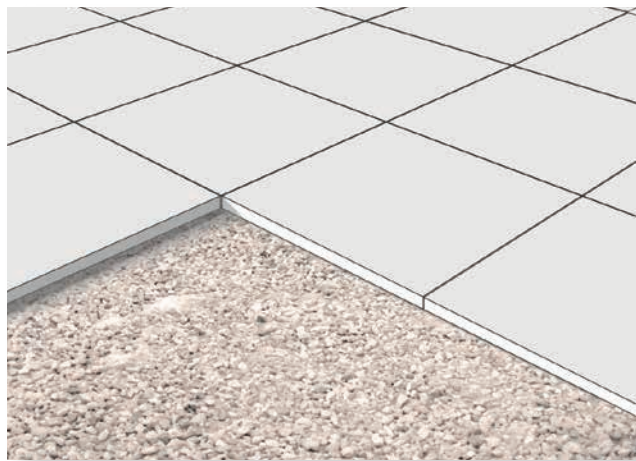


POSA SU GHIAIA O SABBIA  
INSTALLATION ON GRAVEL OR SAND

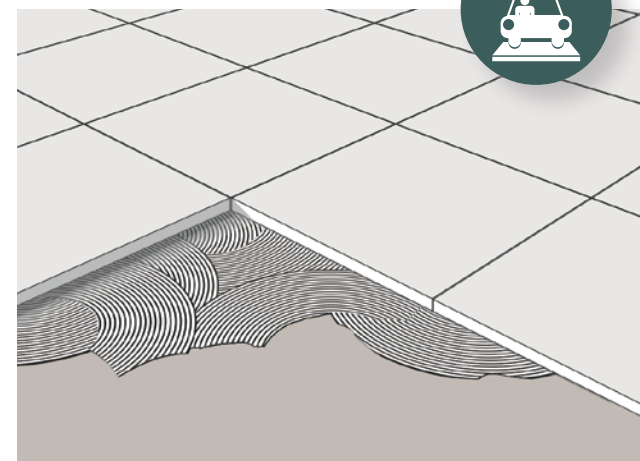


POSA SU MASSETTO CON COLLA  
INSTALLATION ON A SCREED WITH ADHESIVE

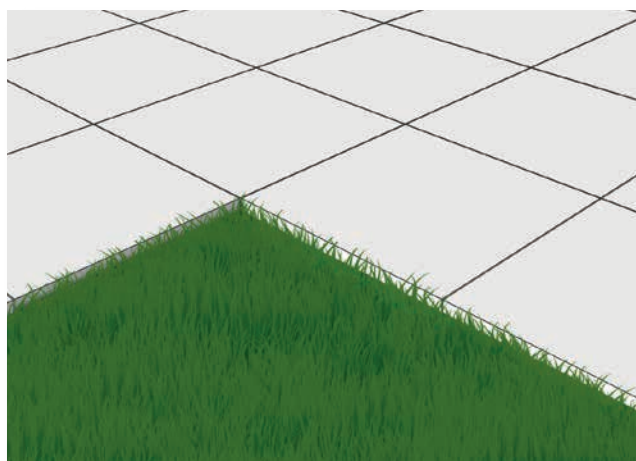

POSA SU ERBA  
INSTALLATION ON GRASS

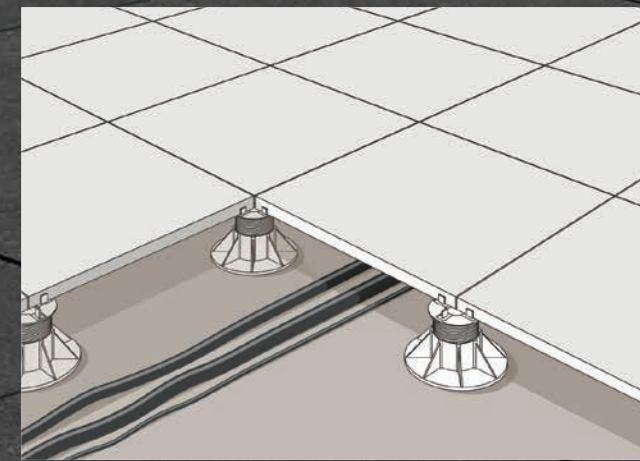

POSA SOPRAELEVATA CON SUPPORTI  
SUSPENDED INSTALLATION WITH SUPPORTS

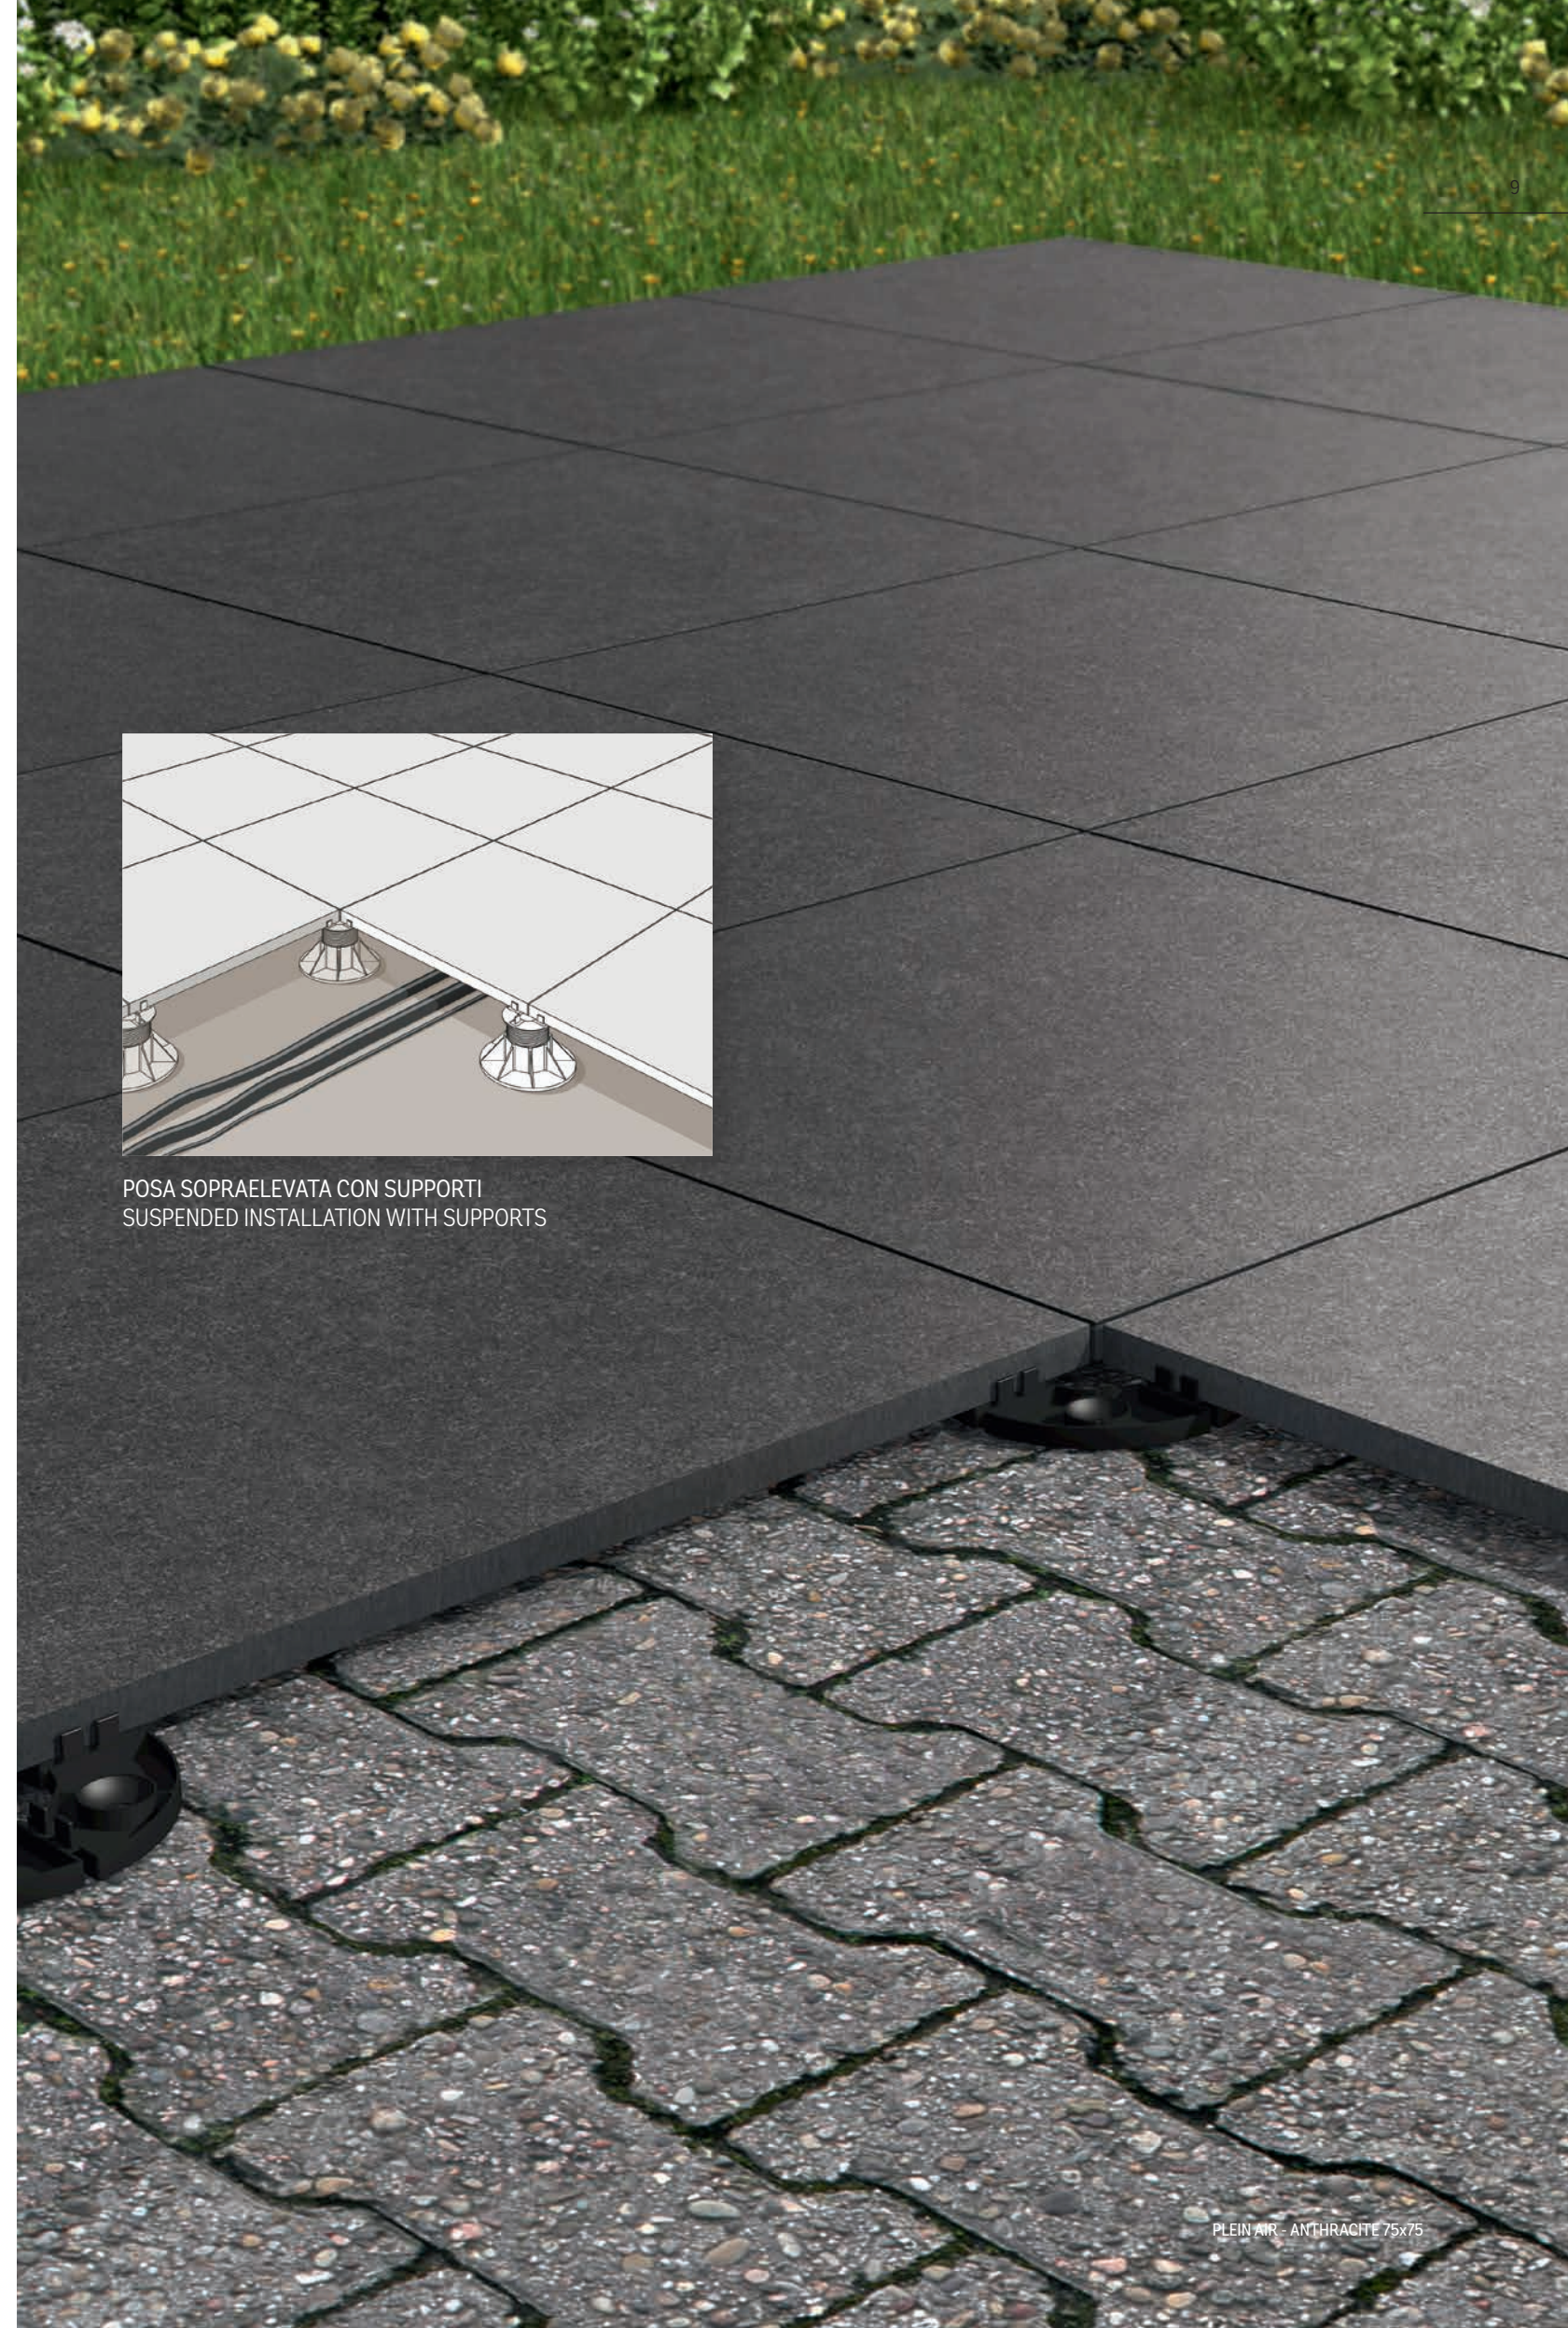

Per informazioni più dettagliate sulle applicazioni consultare il manuale tecnico, disponibile in versione cartacea e sul sito internet.  
For more further details regarding the applications consult the technical manual. The technical manual is available online as well as in hard copy.


# DESTINAZIONI D'USO INTENDED USES




VIALETTI E CAMMINAMENTI  
PATHS AND WALKWAYS



PISCINE E ZONE ADIACENTI  
SWIMMING POOLS AND  
ADJACENT AREAS



TERRAZZE  
TERRACES




PARCHEGGI, AREE CARRABILI  
PARKING AREAS, TRANSITABLE  
AREAS



STABILIMENTI BALNEARI  
BEACH ESTABLISHMENTS



PARCHI PUBBLICI, GIARDINI  
PUBLIC PARKS AND GARDENS



ARREDO URBANO  
STREET FURNISHINGS




AREE INDUSTRIALI E AD  
ALTO CARICO  
INDUSTRIAL AREAS  
SUBJECT TO HEAVY LOADS



# BLUESTONE EVOLUTION

ADVANCED TECHNOLOGY IN BLUE

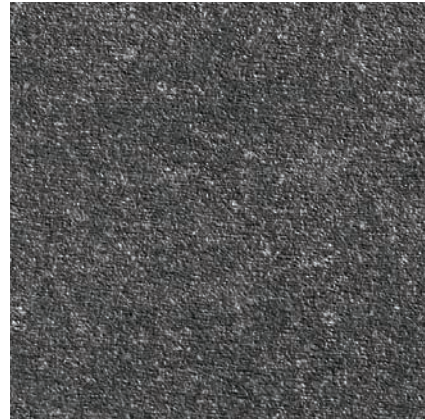

ROCKSTONE

**20mm**  
ULTRA THICK  
PORCELAIN  
STONEWARE

RETTIFICATO  
RECTIFIED

FORMATI  
SIZES

**60x60 cm**  
24"x24"




PEZZI SPECIALI  
SPECIAL PIECES


Elemento Griglia  
Grill Component  
**60x15 cm**  
24"x6"




Gradone costa retta rigato  
con gocciolatoio  
Step tread straight edge with  
grooves and drip flap  
**60x30 cm**  
24"x12"




Gradone costa toro rigato  
con gocciolatoio  
Bullnose-Step tread with  
grooves and drip flap  
**60x30 cm**  
24"x12"



Gradone costa toro  
Step tread with bullnose  
**60x30 cm**  
24"x12"



Gradone costa retta  
Step tread straight edge  
**60x30 cm**  
24"x12"



GARANZIA  
GUARANTEE



**20 ANNI**  
20 YEARS

RESIDENZIALE E PUBBLICO  
RESIDENTIAL AND PUBLIC







# BUXY FLAMMÈ

## NATURAL SPIRIT OUTDOOR




CENDRE

**20mm**ULTRA THICK  
PORCELAIN  
STONEWARERETTIFICATO  
RECTIFIEDFORMATI  
SIZES**75x75 cm**  
30"x30"PEZZI SPECIALI  
SPECIAL PIECES


Elemento Griglia  
Grill Component  
**75x15 cm**  
30"x6"




Gradone costa retta rigato  
con gocciolatoio  
Step tread straight edge with  
grooves and drip flap  
**75x34 cm**  
30"x13<sup>3</sup>/<sub>8</sub>"




Gradone costa toro rigato  
con gocciolatoio  
Bullnose-Step tread with  
grooves and drip flap  
**75x34 cm**  
30"x13<sup>3</sup>/<sub>8</sub>"



Gradone costa toro  
Step tread with bullnose  
**75x34 cm**  
30"x13<sup>3</sup>/<sub>8</sub>"



Gradone costa retta  
Step tread straight edge  
**75x34 cm**  
30"x13<sup>3</sup>/<sub>8</sub>"

GARANZIA  
GUARANTEE**20 ANNI**  
20 YEARSRESIDENZIALE E PUBBLICO  
RESIDENTIAL AND PUBLIC



# CADORE

THE WOOD PLANKS OF THE DOLOMITES



BAITA



BOSCO



MALGA

**20mm**  
ULTRA THICK  
PORCELAIN  
STONEWARE

RETTIFICATO  
RECTIFIED

FORMATI  
SIZES

30x120 cm  
12"x48"



GARANZIA  
GUARANTEE



20 ANNI  
20 YEARS

RESIDENZIALE E PUBBLICO  
RESIDENTIAL AND PUBLIC





# CEMENT PROJECT

## URBAN SPACE



COLOR-10 WORK



COLOR-20 WORK



COLOR-30 WORK

**20mm**  
ULTRA THICK  
PORCELAIN  
STONEWARE

RETTIFICATO  
RECTIFIED

FORMATI  
SIZES

60x120 cm  
24"x48"




PEZZI SPECIALI  
SPECIAL PIECES

Elemento Griglia  
Grill Component  
60x15 cm  
24"x6"



Gradone costa retta rigato  
con gocciolatoio  
Step tread straight edge with  
grooves and drip flap

60x30 cm  
24"x12"



GARANZIA  
GUARANTEE



20 ANNI  
20 YEARS

RESIDENZIALE E PUBBLICO  
RESIDENTIAL AND PUBLIC






# CLUNY

## ESPRIT NATUREL



ARGEROT LAYÉ

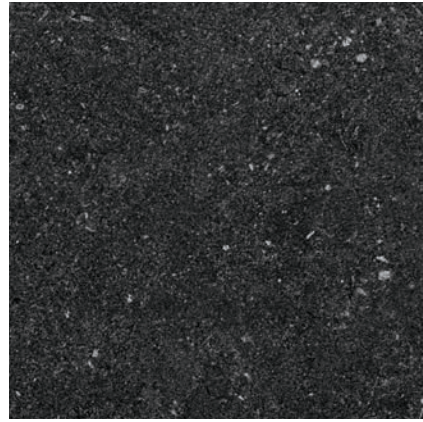

ARDENNE LAYÉ



CHAMPAGNE LAYÉ



BOURGOGNE LAYÉ

**20mm**  
ULTRA THICK  
PORCELAIN  
STONEWARE

RETTIFICATO  
RECTIFIED

FORMATI  
SIZES

75x75 cm  
30"x30"




PEZZI SPECIALI  
SPECIAL PIECES


Elemento Griglia  
Grill Component  
75x15 cm  
30"x6"




Gradone costa retta rigato  
con gocciolatoio  
Step tread straight edge with  
grooves and drip flap  
75x34 cm  
30"x13<sup>3</sup>/<sub>8</sub>"




Gradone costa toro rigato  
con gocciolatoio  
Bullnose-Step tread with  
grooves and drip flap  
75x34 cm  
30"x13<sup>3</sup>/<sub>8</sub>"



Gradone costa toro  
Step tread with bullnose  
75x34 cm  
30"x13<sup>3</sup>/<sub>8</sub>"



Gradone costa retta  
Step tread straight edge  
75x34 cm  
30"x13<sup>3</sup>/<sub>8</sub>"



GARANZIA  
GUARANTEE



20 ANNI  
20 YEARS

RESIDENZIALE E PUBBLICO  
RESIDENTIAL AND PUBLIC









# LIMESTONE

## STONE SURFACE




CLAY FIAMMATA



AMBER FIAMMATA



OYSTER FIAMMATA

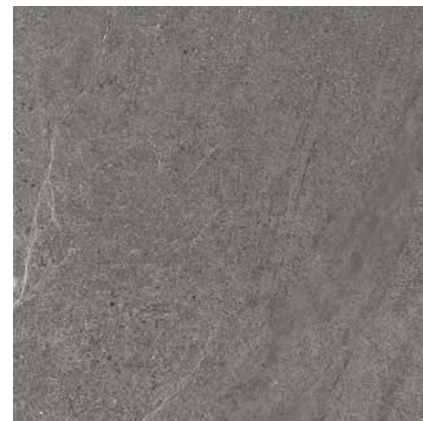

SLATE FIAMMATA

**20mm**  
ULTRA THICK  
PORCELAIN  
STONEWARE

RETTIFICATO  
RECTIFIED

FORMATI  
SIZES

60x120 cm  
24"x48"




PEZZI SPECIALI  
SPECIAL PIECES


Elemento Griglia  
Grill Component  
60x15 cm  
24"x6"




Gradone costa retta rigato  
con gocciolatoio  
Step tread straight edge with  
grooves and drip flap  
60x30 cm  
24"x12"




Gradone costa toro rigato  
con gocciolatoio  
Bullnose-Step tread with  
grooves and drip flap  
60x30 cm  
24"x12"



Gradone costa toro  
Step tread with bullnose  
60x30 cm  
24"x12"



Gradone costa retta  
Step tread straight edge  
60x30 cm  
24"x12"



GARANZIA  
GUARANTEE



20 ANNI  
20 YEARS

RESIDENZIALE E PUBBLICO  
RESIDENTIAL AND PUBLIC






# PLEIN AIR

## THE NEW GARDEN STYLE



GRIS

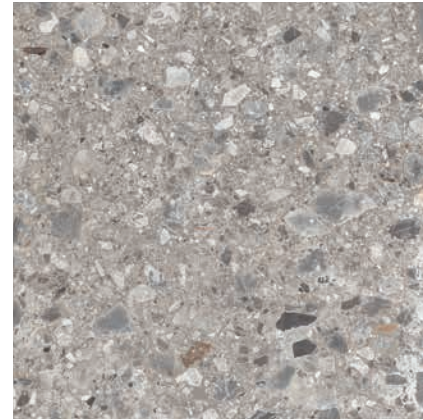

CEPPO



ANTHRACITE

**20mm**  
ULTRA THICK  
PORCELAIN  
STONEWARE

RETTIFICATO  
RECTIFIED

FORMATI  
SIZES

75x75 cm  
30"x30"




PEZZI SPECIALI  
SPECIAL PIECES


Elemento Griglia  
Grill Component  
75x15 cm  
30"x6"




Gradone costa retta rigato  
con gocciolatoio  
Step tread straight edge with  
grooves and drip flap  
75x34 cm  
30"x13<sup>3</sup>/<sub>8</sub>"




Gradone costa toro rigato  
con gocciolatoio  
Bullnose-Step tread with  
grooves and drip flap  
75x34 cm  
30"x13<sup>3</sup>/<sub>8</sub>"



Gradone costa toro  
Step tread with bullnose  
75x34 cm  
30"x13<sup>3</sup>/<sub>8</sub>"



Gradone costa retta  
Step tread straight edge  
75x34 cm  
30"x13<sup>3</sup>/<sub>8</sub>"



GARANZIA  
GUARANTEE



20 ANNI  
20 YEARS

RESIDENZIALE E PUBBLICO  
RESIDENTIAL AND PUBLIC



CEPPO 75x75  
STEP TREAD STRAIGHT EDGE WITH GROOVES AND DRIP FLAP 75x34 - GRILL COMPONENT 75x15







# SECRET STONE

TIMELESS BEAUTY




MYSTERY WHITE BOCCIARDATA



PRECIOUS BEIGE BOCCIARDATA



SHADOW GREY BOCCIARDATA

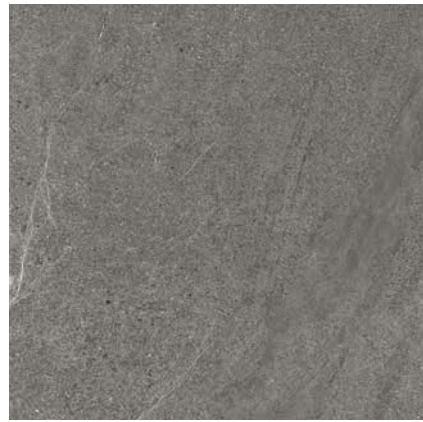

RARE DARK BOCCIARDATA

**20mm**  
ULTRA THICK  
PORCELAIN  
STONEWARE

RETTIFICATO  
RECTIFIED


FORMATI  
SIZES

60x120 cm  
24"x48"




PEZZI SPECIALI  
SPECIAL PIECES


Elemento Griglia  
Grill Component  
60x15 cm  
24"x6"




Gradone costa retta rigato  
con gocciolatoio  
Step tread straight edge with  
grooves and drip flap  
60x30 cm  
24"x12"




Gradone costa toro rigato  
con gocciolatoio  
Bullnose-Step tread with  
grooves and drip flap  
60x30 cm  
24"x12"



Gradone costa toro  
Step tread with bullnose  
60x30 cm  
24"x12"



Gradone costa retta  
Step tread straight edge  
60x30 cm  
24"x12"



GARANZIA  
GUARANTEE



20 ANNI  
20 YEARS

RESIDENZIALE E PUBBLICO  
RESIDENTIAL AND PUBLIC



PRECIOUS BEIGE BOCCIARDATA 60x120  
STEP TREAD STRAIGHT EDGE WITH GROOVES AND DRIP FLAP 60x30 - GRILL COMPONENT 60x15







# STONEQUARTZ

## THE NORTHERN STONE



ARTIC FIAMMATA



BERGEN FIAMMATA



OSLO FIAMMATA



NORDIC FIAMMATA

**20mm**  
ULTRA THICK  
PORCELAIN  
STONEWARE

RETTIFICATO  
RECTIFIED

FORMATI  
SIZES

60x120 cm  
24"x48"




60x60 cm  
24"x24"




PEZZI SPECIALI  
SPECIAL PIECES


Elemento Griglia  
Grill Component  
60x15 cm  
24"x6"




Gradone costa retta  
con gocciolatoio  
Step tread straight edge with  
grooves and drip flap  
60x30 cm  
24"x12"




Gradone costa toro rigato  
con gocciolatoio  
Bullnose-Step tread with  
grooves and drip flap  
60x30 cm  
24"x12"



Gradone costa toro  
Step tread with bullnose  
60x30 cm  
24"x12"



Gradone costa retta  
Step tread straight edge  
60x30 cm  
24"x12"



GARANZIA  
GUARANTEE



20 ANNI  
20 YEARS

RESIDENZIALE E PUBBLICO  
RESIDENTIAL AND PUBLIC



ARTIC FIAMMATA 60x60 - BULLNOSE-STEP TREAD WITH GROOVES AND DRIP FLAP 60x30









ELEMENTO GRIGLIA  
GRILL COMPONENT  
BERGEN FIAMMATA 15x60















GRADONE COSTA RETTA  
STEP TREAD STRAIGHT EDGE  
BERGEN FIAMMATA 30x60



GRADONE COSTA RETTA RIGATO CON GOCCIOLATOIO  
STEP TREAD STRAIGHT EDGE WITH GROOVES AND DRIP FLAP  
BERGEN FIAMMATA 30x60





## CARATTERISTICHE TECNICHE | TECHNICAL CHARACTERISTICS

|   | BLUESTONE EVOLUTION   | BUXY FLAMMÉ   | CADORE  | CEMENT PROJECT  |  | CLUNY   | LIMESTONE   | PLEIN AIR   | SECRET STONE  | STONEQUARTZ   |  |
|---|---|---|---|---|--|---|---|---|---|---|--|
|    | <b>RESISTENZA ALLO SCIVOLAMENTO</b> SLIP RESISTANCE   |   |   |   |  |   |   |   |   |   |  |
| DIN 51130   | R11   | R12   | R11   | R12   |  | R11   | R11   | R12   | R11   | R11   |  |
| DIN 51097   | C (A+B+C)   | C (A+B+C)   | C (A+B+C)   | C (A+B+C)   |  | C (A+B+C)   | C (A+B+C)   | C (A+B+C)   | C (A+B+C)   | C (A+B+C)   |  |
| BCR-TORTUS  | $\mu > 0,40$  | $\mu > 0,40$  | $\mu > 0,40$  | $\mu > 0,40$  |  | $\mu > 0,40$  | $\mu > 0,40$  | $\mu > 0,40$  | $\mu > 0,40$  | $\mu > 0,40$  |  |
| ANSI A326.3   | -   | DCOF $\geq 0.42$  | DCOF $\geq 0.42$  | DCOF $\geq 0.42$  |  | -   | DCOF $\geq 0.42$  | DCOF $\geq 0.42$  | DCOF $\geq 0.42$  | DCOF $\geq 0.42$  |  |
| AS/NZS 4586   | P4  | P4  | P4  | P4  |  | P4  | -   | P4  | -   | P4  |  |
| UNE ENV 12633   | Clase 3   | Clase 3   | Clase 2   | Clase 3   |  | Clase 3   | Clase 3   | Clase 3   | Clase 3   | Clase 2   |  |
|    | <b>CARICO DI ROTTURA (S) Valore medio</b> BREAKING STRENGTH (S) Average value   |   |   |   |  |   |   |   |   |   |  |
| ISO 10545-4   | 13.600 N  | 13.600 N  | 13.600 N  | 13.600 N  |  | 13.600 N  | 13.600 N  | 13.600 N  | 13.600 N  | 13.600 N  |  |
| ASTM C 648  | 2,800 lbf   | 2,800 lbf   | 2,800 lbf   | 2,800 lbf   |  | 2,800 lbf   | 2,800 lbf   | 2,800 lbf   | 2,800 lbf   | 2,800 lbf   |  |
|    | <b>RESISTENZA ALLA FLESSIONE Valore medio</b> MODULUS OF RUPTURE Average value  |   |   |   |  |   |   |   |   |   |  |
| ISO 10545-4   | 50 N/mm <sup>2</sup>  | 50 N/mm <sup>2</sup>  | 50 N/mm <sup>2</sup>  | 50 N/mm <sup>2</sup>  |  | 50 N/mm <sup>2</sup>  | 50 N/mm <sup>2</sup>  | 50 N/mm <sup>2</sup>  | 50 N/mm <sup>2</sup>  | 50 N/mm <sup>2</sup>  |  |
|    | <b>CARRABILITÀ Valore medio**</b> TRANSITABILITY Average value**  |   |   |   |  |   |   |   |   |   |  |
| EN 1339   | T11-U11   | T11-U11   | -   | T11-U11   |  | T11-U11   | T11-U11   | T11-U11   | T11-U11   | T11-U11   |  |
|    | <b>RESISTENZA ALLE MACCHIE</b> STAIN RESISTANCE   |   |   |   |  |   |   |   |   |   |  |
| ISO 10545-14  | 5 Resistente/Resistant  | 5 Resistente/Resistant  | 5 Resistente/Resistant  | 5 Resistente/Resistant  |  | 5 Resistente/Resistant  | 5 Resistente/Resistant  | 5 Resistente/Resistant  | 5 Resistente/Resistant  | 5 Resistente/Resistant  |  |
| ASTM C 1378   | A Resistente/Resistant  | A Resistente/Resistant  | A Resistente/Resistant  | A Resistente/Resistant  |  | A Resistente/Resistant  | A Resistente/Resistant  | A Resistente/Resistant  | A Resistente/Resistant  | A Resistente/Resistant  |  |
|    | <b>RESISTENZA ALL'ATTACCO CHIMICO*</b> RESISTANCE TO CHEMICAL ETCHING*  |   |   |   |  |   |   |   |   |   |  |
| ISO 10545-13  | LA-HA Resistente/Resistant  | LA-HA Resistente/Resistant  | LA-HA Resistente/Resistant  | LA-HA Resistente/Resistant  |  | LA-HA Resistente/Resistant  | LA-HA Resistente/Resistant  | LA-HA Resistente/Resistant  | LA-HA Resistente/Resistant  | LA-HA Resistente/Resistant  |  |
| ASTM C 650  | A Resistente/Resistant  | A Resistente/Resistant  | A Resistente/Resistant  | A Resistente/Resistant  |  | A Resistente/Resistant  | A Resistente/Resistant  | A Resistente/Resistant  | A Resistente/Resistant  | A Resistente/Resistant  |  |
|  | <b>RESISTENZA ALL'ABRASIONE PROFONDA Valore medio</b> DEEP ABRASION RESISTANCE Average value                              |   |   |   |  |   |   |   |   |   |  |
| ISO 10545-6 / ASTM C 1243   | 143 mm <sup>3</sup>   | 143 mm <sup>3</sup>   | 143 mm <sup>3</sup>   | 143 mm <sup>3</sup>   |  | 143 mm <sup>3</sup>   | 143 mm <sup>3</sup>   | 143 mm <sup>3</sup>   | 143 mm <sup>3</sup>   | Conforme/Compliant  |  |
|  | <b>ASSORBIMENTO D'ACQUA Valore medio</b> WATER ABSORPTION Average value   |   |   |   |  |   |   |   |   |   |  |
| ISO 10545-3 / ASTM C 373  | 0,05%   | 0,05%   | 0,05%   | 0,05%   |  | 0,05%   | 0,05%   | 0,05%   | 0,05%   | 0,05%   |  |
|  | <b>RESISTENZA AL GELO</b> FROST RESISTANCE  |   |   |   |  |   |   |   |   |   |  |
| ISO 10545-12 / ASTM C 1026  | Resistente/Resistant  | Resistente/Resistant  | Resistente/Resistant  | Resistente/Resistant  |  | Resistente/Resistant  | Resistente/Resistant  | Resistente/Resistant  | Resistente/Resistant  | Resistente/Resistant  |  |
|  | <b>DILATAZIONE TERMICA LINEARE</b> LINEAR THERMAL EXPANSION   |   |   |   |  |   |   |   |   |   |  |
| ISO 10545-8   | $\alpha \leq 7 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$   | $\alpha \leq 7 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$   | $\alpha \leq 7 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$   | $\alpha \leq 7 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$   |  | $\alpha \leq 7 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$   | $\alpha \leq 7 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$   | $\alpha \leq 7 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$   | $\alpha \leq 7 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$   | $\alpha \leq 7 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$   |  |
| ASTM C 372  | $\alpha \leq 4,4 \times 10^{-6} \text{ } ^\circ\text{F}^{-1} / \alpha \leq 8 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$ | $\alpha \leq 4,4 \times 10^{-6} \text{ } ^\circ\text{F}^{-1} / \alpha \leq 8 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$ | $\alpha \leq 4,4 \times 10^{-6} \text{ } ^\circ\text{F}^{-1} / \alpha \leq 8 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$ | $\alpha \leq 4,4 \times 10^{-6} \text{ } ^\circ\text{F}^{-1} / \alpha \leq 8 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$ |  | $\alpha \leq 4,4 \times 10^{-6} \text{ } ^\circ\text{F}^{-1} / \alpha \leq 8 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$ | $\alpha \leq 4,4 \times 10^{-6} \text{ } ^\circ\text{F}^{-1} / \alpha \leq 8 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$ | $\alpha \leq 4,4 \times 10^{-6} \text{ } ^\circ\text{F}^{-1} / \alpha \leq 8 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$ | $\alpha \leq 4,4 \times 10^{-6} \text{ } ^\circ\text{F}^{-1} / \alpha \leq 8 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$ | $\alpha \leq 4,4 \times 10^{-6} \text{ } ^\circ\text{F}^{-1} / \alpha \leq 8 \times 10^{-6} \text{ } ^\circ\text{C}^{-1}$ |  |
|  | <b>REAZIONE AL FUOCO</b> FIRE REACTION  |   |   |   |  |   |   |   |   |   |  |
| EN 13823  | Classe/Class A1 (wall)  | Classe/Class A1 (wall)  | Classe/Class A1 (wall)  | Classe/Class A1 (wall)  |  | Classe/Class A1 (wall)  | Classe/Class A1 (wall)  | Classe/Class A1 (wall)  | Classe/Class A1 (wall)  | Classe/Class A1 (wall)  |  |
| EN 9239-1   | Classe/Class A1fl (floor)   | Classe/Class A1fl (floor)   | Classe/Class A1fl (floor)   | Classe/Class A1fl (floor)   |  | Classe/Class A1fl (floor)   | Classe/Class A1fl (floor)   | Classe/Class A1fl (floor)   | Classe/Class A1fl (floor)   | Classe/Class A1fl (floor)   |  |
|  | <b>FLAME SPREAD</b>   |   |   |   |  |   |   |   |   |   |  |
| ASTM E84  | Class A   | Class A   | Class A   | Class A   |  | Class A   | Class A   | Class A   | Class A   | Class A   |  |
|  | <b>CONDUCIBILITÀ TERMICA</b> THERMAL CONDUCTIVITY   |   |   |   |  |   |   |   |   |   |  |
| EN 12524  | $\lambda = 1,3 \text{ W/m}^\circ\text{K} / 0,7 \text{ BTU/ft h}^\circ\text{F}$  | $\lambda = 1,3 \text{ W/m}^\circ\text{K} / 0,7 \text{ BTU/ft h}^\circ\text{F}$  | $\lambda = 1,3 \text{ W/m}^\circ\text{K} / 0,7 \text{ BTU/ft h}^\circ\text{F}$  | $\lambda = 1,3 \text{ W/m}^\circ\text{K} / 0,7 \text{ BTU/ft h}^\circ\text{F}$  |  | $\lambda = 1,3 \text{ W/m}^\circ\text{K} / 0,7 \text{ BTU/ft h}^\circ\text{F}$  | $\lambda = 1,3 \text{ W/m}^\circ\text{K} / 0,7 \text{ BTU/ft h}^\circ\text{F}$  | $\lambda = 1,3 \text{ W/m}^\circ\text{K} / 0,7 \text{ BTU/ft h}^\circ\text{F}$  | $\lambda = 1,3 \text{ W/m}^\circ\text{K} / 0,7 \text{ BTU/ft h}^\circ\text{F}$  | $\lambda = 1,3 \text{ W/m}^\circ\text{K} / 0,7 \text{ BTU/ft h}^\circ\text{F}$  |  |
|  | <b>STONALIZZAZIONE</b> DESHADING  |   |   |   |  |   |   |   |   |   |  |
| ANSI A137.1   | V2  | V3  | V4  | V2  |  | V2  | V2  | V2  | V2  | V3 Artic, Oslo - V4 Bergen, Nordic  |  |

\* Ad esclusione dell'acido fluoridrico e derivati. / Excluding hydrofluoric acid and its derivatives.

\*\* Carrabile quando incollata su massetto. La classificazione si riferisce al solo formato quadrato. / Transitabile when applied to a screed with adhesive. This information applies only to square formats.

## INFORMAZIONI SULLA PULIZIA | NETTOYAGE INFORMATIONS

|   |  |   |   |   |  |   |   |                              |   |   |  |
|---|--|---|---|---|--|---|---|------------------------------|---|---|--|
|  | <b>VISIBILITÀ DELLE IMPRONTE</b> TREAD MARK VISIBILITY |   |   |   |  |   |   |                              |   |   |  |
| METODO COTTO D'ESTE<br>COTTO D'ESTE METHOD  | B  | B | B | B |  | B | B | B Anthracite, Ceppo - C Gris | B | B |  |
|  | <b>FACILITÀ DI PULIZIA</b> CLEANING EASINESS           |   |   |   |  |   |   |                              |   |   |  |
| METODO COTTO D'ESTE<br>COTTO D'ESTE METHOD  | 2  | 2 | 2 | 2 |  | 2 | 2 | 2                            | 2 | 2 |  |

## CERTIFICAZIONI | CERTIFICATIONS



EN 14411

Le DOP sono disponibili sul sito internet [www.cottodeste.it](http://www.cottodeste.it)  
DOP are available on the website [www.cottodeste.it](http://www.cottodeste.it)



**EMAS**  
GESTIONE AMBIENTALE  
VERIFICATA  
reg. n. 4100009  
Stabilimento di  
Finale Emilia (MO)



**EMAS**  
GESTIONE AMBIENTALE  
VERIFICATA  
reg. n. 4100039  
Stabilimento di  
Toano (RE)



UNI EN ISO 9001:2008

SISTEMA DI GESTIONE  
QUALITÀ CERTIFICATO


Sistema di gestione  
della qualità siti produttivi  
Quality management  
system of production sites



UNI EN ISO 14001:2004

SISTEMA DI GESTIONE  
AMBIENTALE CERTIFICATO

Sistema di gestione  
ambientale siti produttivi  
Environmental management  
system of production sites



“ ”  
Ceramics of Italy



Cotto d'Este, tramite la holding Panariagroup Industrie Ceramiche S.p.A., è membro dello U.S. Green Building Council e del Green Building Council Italia: organizzazioni che promuovono negli Stati Uniti e sul territorio italiano la realizzazione di edifici ed opere nel rispetto dell'ambiente, della salute e del benessere delle persone che ci vivono e lavorano.

Cotto d'Este, through Panariagroup Industrie Ceramiche S.p.A. holding, is a member of the U.S.Green Building Council and of the Italian Green Building Council: these are organisations that promote in the U.S. and in Italy buildings that are environmentally responsible, profitable and healthy places to live and work.

**SANO SICURO ECOSOSTENIBILE**

Cotto d'Este ha scelto di schierarsi in difesa del pianeta. Lo ha fatto e continua a farlo ogni giorno con azioni concrete, attraverso investimenti in tecnologie più evolute e scelte produttive che rispondono a logiche di ecosostenibilità. Perché in fondo, pur essendo il risultato di un processo industriale complesso e tecnologicamente avanzato, la ceramica resta un prodotto naturale. Una ricetta semplice, fatta di pochi elementi essenziali come terra, acqua e fuoco, consente di ottenere un prodotto resistente e versatile, pratico e igienico, che vanta un elevato valore in termini di bellezza e design. Tanto più se la filiera produttiva dialoga con l'ambiente in maniera responsabile: riducendo il fabbisogno di materie prime, riciclando acque e scarti di lavorazione, impiegando energie rinnovabili e gestendole con impianti ad alta efficienza. Riducendo in sostanza l'impronta ecologica che la produzione industriale imprime sulla superficie del pianeta.

**HEALTHY SAFE ECOFRIENDLY**

Cotto d'Este has chosen to take a stand in defence of the planet. The company has an on-going commitment to minimise its environmental impact through concrete actions carried out every day. These include investing in the most advanced technologies and making production decisions based on logics of sustainability. Despite being the result of a complex industrial and technologically advanced process, ceramics are a natural product. Following a simple recipe, composed of a few essential elements such as earth, fire and water, it is possible to obtain a strong, versatile, practical and hygienic product, which has a high value in terms of beauty and design. This is particularly the case if the production chain interacts with the environment in a responsible way by reducing the need for raw materials, recycling water and waste products, using renewable energy and managing the process with high-efficiency systems, thus substantially reducing the carbon footprint that the industrial production leaves on the surface of the planet.

OUTDOOR COLLECTION BOOK

Art Direction & Graphic Design  
Group Marketing & Communications Panariagroup

January 2018

FOLLOW US ON



**COTTOD'ESTE**<sup>®</sup> | LA  
Nuove Superfici | BELLEZZA  
IN  
CERAMICA

Via Emilia Romagna, 31 | 41049 Sassuolo (MO) Italy  
Tel +39 0536 814 911 | Fax +39 0536 814 921  
cottodeste.it - info@cottodeste.it  
PANARIAGROUP INDUSTRIE CERAMICHE S.p.A.